



100V 115/120V 230/240V

Eos Series



GENERAL INFORMATION

An optional main/backup processor for the Eos Titanium, Eos, Gio and Gio @5 control systems, the Eos RPU3 can also be used as a stand-alone lighting playback controller.

FEATURES

- 4,096 or 24,576 outputs
- 32,768 control channels
- Up to 99 Discrete Users
- Partitioned Control
- Access to all Eos application programming functions
- 20 User programmable front panel buttons
- Six front panel LED status indicators
- 2U 19" Rack-mount enclosure

INTERFACES

- AC Input (100 – 240 VAC at 50/60Hz)
- Two individually configurable Ethernet ports 802.3af compliant, PSE
- ETCNet2, Net3, Art-Net and Avab UDP
- Three display-port connectors support external displays (1280x1024 minimum resolution) with optional single-touch or multi-touch screen control
- Four DMX 512-A/RDM ports
- Contact Closure triggers via D-Sub Connector
- Seven multi-purpose USB ports
- ETCpad - Portable Access Device (Via Ethernet)
- MIDI Time Code, MIDI show control through gateway
- Phone Remote
- SMPTE Time Code through gateway
- Contact closure (12 analog inputs, 12 SPDT contact outputs, RS-232) through gateway

ORDERING INFORMATION

Eos RPU3 Remote Processor Units

PART NO	DESCRIPTION
4350A1015-EU	Eos Remote Processor 3, 4,096 Outputs (min) (Option for 24,576 Outputs)
4350A0064	Eos RPU3 Initial Upgrade 20,480 outputs
4350A0063	Eos RPU3 After-sale Upgrade 20,480 outputs
4380A1011	ETCnomad 512 (For use as Client Software Kit)

Eos Remote Processor Unit Accessories

PART NO	DESCRIPTION
4240A1021-EU	Eos Motorized Fader WIng 10
4240A1022-EU	Eos Motorized Fader Wing 20
4240A1023-EU	Eos Standard Fader Wing 20
4240A1024-EU	Eos Standard Fader Wing 40
4250A1130	Net3 RV13 Remote Video Interface , 3 video out
4250A1122	ETCpad - Portable Access Device
M8199-F	23" 10-Point Multi-touch Screen, 1920x1080 res.
M8200-F	27" 10-Point Multi-touch Screen, 1920x1080 res.

See the ETC Net3 product range for Net3 DMX/RDM, Show Control and I/O gateways.

Note: Eos RPU3 with 3 DVI ports can only be upgraded to 12,288 outputs. Please contact ETC for this upgrade.

For projects exceeding 24,576 outputs, please contact ETC

SHIPS WITH:

- Three-button scroll mouse and mousepad
- Alpha-numeric keyboard
- Three display-port to DVI adapters
- IEC to UK13A and IEC to Schuko power cords



PHYSICAL

Eos RPU3 Dimensions*


MODEL	HEIGHT	WIDTH	DEPTH
	mm	mm	mm
Eos RPU3	89	435	345

Eos RPU3 Weights*

MODEL	WEIGHT	SHIPPING WEIGHT
	kgs	kgs
Eos RPU3	10.2	16.0

*Weights and dimensions typical


REAR VIEW

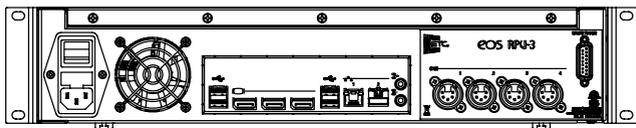


SIDE VIEW




TOP VIEW

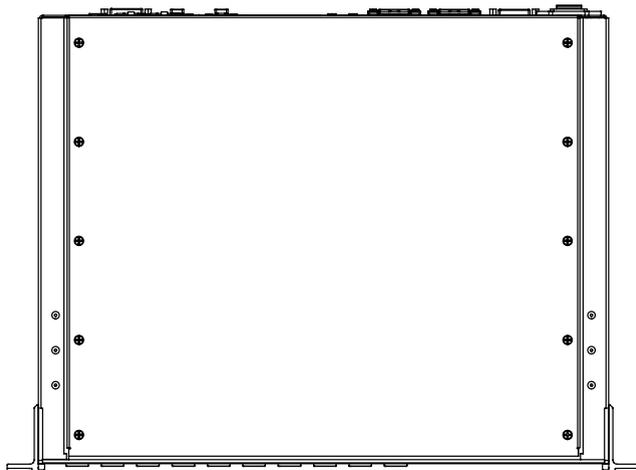

FRONT VIEW

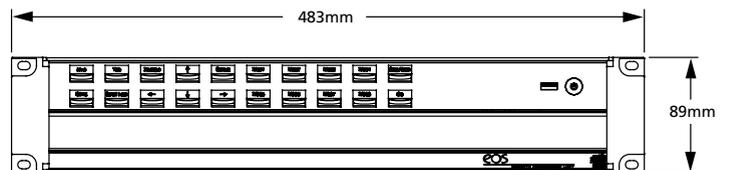

AVAILABLE FROM

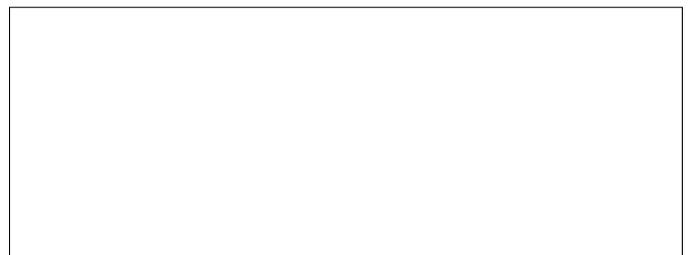

Corporate Headquarters • 3031 Pleasant View Rd, PO Box 620979, Middleton WI 53562 0979 USA • +1 608 831 4116

London, UK • Unit 26-28, Victoria Industrial Estate, Victoria Road, London W3 6UU, UK • +44 (0) 20 8896 1000

Rome, IT • Via Pieve Torina, 48, 00156 Rome, Italy • +39 (06) 32 111 683

Holzkirchen, DE • Ohmstrasse 3, 83607 Holzkirchen, Germany • +49 (80 24) 47 00-0

Hong Kong • Room 1801, 18/F, Tower 1 Phase 1, Enterprise Square, 9 Sheung Yuet Road, Kowloon Bay, Kowloon, Hong Kong • +852 2799 1220

Web • etconnect.com • Copyright©2018 ETC. All Rights Reserved. All product information and specifications subject to change. 4350L1015-GB Rev G 02/2018