ETC®

Gadget II

Gateway Series

GENERAL INFORMATION

A portable USB to two DMX ports interface, Gadget II connects via USB to any computer without a network infrastructure. When used with PC- or Mac-based ETCnomad® controllers, Gadget II outputs levels via DMX and initiates bidirectional communication using RDM. The device can also be used with UpdaterAtor or Net3 Concert software to interact with RDM-enabled fixtures or to update a range of ETC devices.

APPLICATIONS
- Houses of worship
- High schools
- Community theatres
- Academic theatres
- Touring
- Tech table
- System integration

FEATURES
- Two DMX/RDM ports using XLR5 connectors
- Distributes DMX and RDM
- USB connectivity
- USB activity indicators
- Compatible with ETCnomad software
  (Requires Eos V2.4 / Cobalt V7.3 or higher)
- Compatible with Net3 Concert software
- Compatible with UpdaterAtor software

ORDERING INFORMATION

Gadget

PART NO.	DESCRIPTION
4267A1004	Gadget II Two Port USB to DMX/RDM Interface

SPECIFICATIONS

FUNCTIONAL
- Supports RDM (ANSI E1.20)
- USITT DMX512 and ANSI E1.11 DMX512-A compliant

MECHANICAL
- Finished in fine-textured, powder coat paint with matching overlay
- Two integrated 5-pin XLR DMX output port
- Type B USB female connection
- Activity LED

ENVIRONMENTAL
- Ambient operating temperature: 0° to 40°C
- Operating humidity: 0% - 95% non-condensing

ELECTRICAL
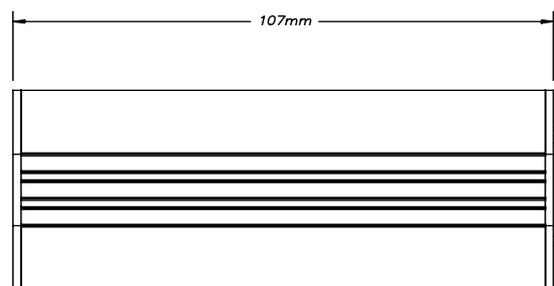- 5V USB power required
- RoHS Compliant (lead-free)
- CE compliant
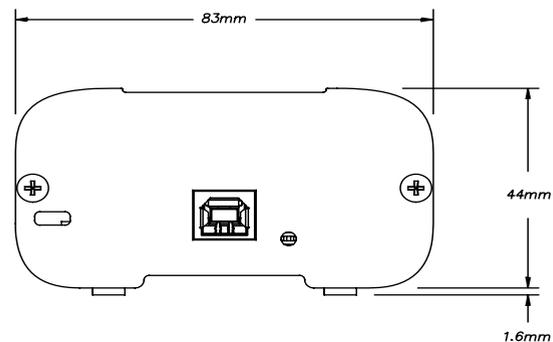
PHYSICAL

Gadget II Dimensions

MODEL	HEIGHT	WIDTH	DEPTH
	mm	mm	mm
Gadget	44	107	83

Gadget II Weights

MODEL	WEIGHT	SHIPPING WEIGHT
	kgs	kgs
Gadget	0.22	0.34

* Weight without hanging hardware

GADGET II