ETC®

ETCpad

Eos® Series

GENERAL INFORMATION

The ETC Portable Access Device (ETCpad) provides comprehensive wireless or wired remote control of your Eos Family lighting control system. The small handheld device provides access to live programming functions, playback, parking and patch using a full function soft keypad and tabs for ML controls, direct selects and playback controls. The ETCpad is an 8" industrial tablet that is Android-based with a capacitive multi-touch display. The batteries are rechargeable and a number of accessories are available. Wireless access requires use of a wireless access point, which is separate. Wired operation is provided via the lighting system network.

FEATURES

- Wireless or wired operation
- 8" full HD display with scratch-resistant glass and multi-touch control
- One Micro HDMI
- One Micro USB 2.0
- One Micro SIM
- Power switch
- Power/battery status indicator
- Operating Temperature: -10-50 °C; 0-40 °C when charging
- Cable management for Ethernet up to 6mm in diameter
- IP65 rated

ORDERING INFORMATION

ETCpad

PART NO.	DESCRIPTION
4250A1122	ETCpad - Portable Access Device

ETCpad Accessories

PART NO.	DESCRIPTION
M7583	Hand Strap (replacement)
M7584	Shoulder Strap
M7585	EETi Stylus Pen
M7586	Battery Pack with Meter
M7587	Multi-tablet Charger
M7588	Office Dock
M7589	VESA Dock
M7599	ETCpad USB Hub

*Wireless operation of the ETCpad requires a wireless access point, provided by others.

NOTE: The ETCpad requires Eos software v2.6.4 or later to function.

Ships with:
- Hand Strap
- Charging cable/adapter

SPECIFICATIONS

COMPATIBILITY
- Eos Ti
- Eos
- Gio
- Gio @5
- Ion Xe/Ion Xe 20
- Ion
- Element
- Eos RPU
- Eos RPU3
- Ion Xe RPU
- Ion RPU
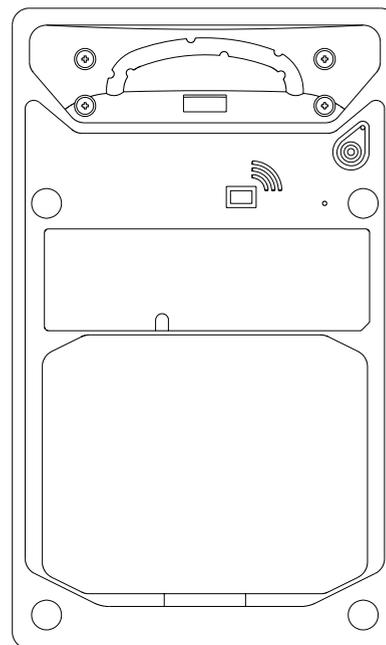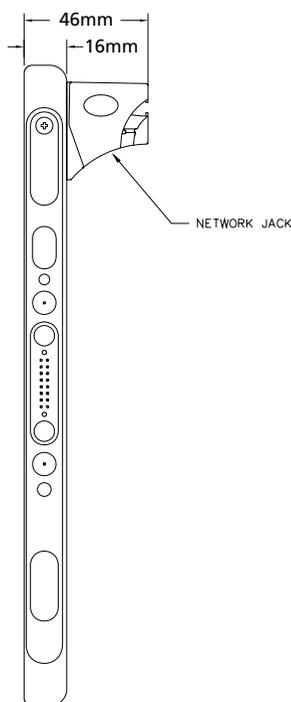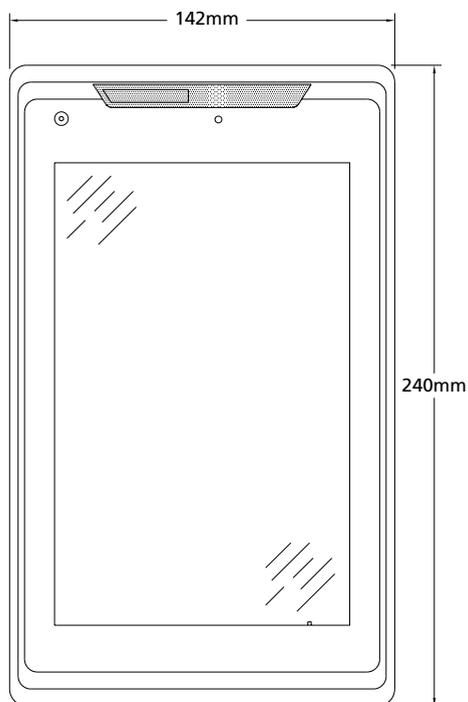- ETCnomad
- ETCnomad Puck
- Net3 RVI
- Net3 RVI3

PHYSICAL

ETCpad Dimensions

MODEL	HEIGHT	WIDTH	DEPTH
	mm	mm	mm
ETCpad	240	142	16

ETCpad Weights

MODEL	WEIGHT	SHIPPING WEIGHT
	kgs	kgs
ETCpad	0.60	1.13